

Canopy
Crystal 90 cm
Black

EAN 5414425221394

**Energy label**

▪ Energy Efficiency class (EElhood)	B
▪ Annual Energy Consumption (kWh/year) (AEChood)	59,3
▪ Fluid Dynamic Efficiency class (FDEhood)	A
▪ Lighting Efficiency class (LEhood)	A
▪ Grease Filtering Efficiency class (GFEhood)	D

Functions & features

▪ Motor	Integrated
▪ Sound absorber	Integrated
▪ Recirculation	Optional
▪ InTouch function	Standard
▪ Auto stop	▪
▪ Delayed switch off (minutes)	10/30
▪ Grease filter	26050020
▪ Number of grease filters	1
▪ Grease filter cleaning indication	▪
▪ Recirculation filter cleaning indication	▪
▪ Control method	Push buttons
▪ Number of speeds	4
▪ Automatic Power revert (minutes)	6

Dimensions

▪ Product dimensions (WxDxH) (mm)	833 x 313 x 308
▪ Width flange (mm)	14
▪ Dimensions cut-out opening (WxD) (mm)	810 x 290
▪ Min dimensions cabinet (WxDxH) (mm)	x 600 x
▪ Advised mounting height induction hobs (Hmin-Hmax) (mm)	650 - 750
▪ Advised mounting height gas hobs (Hmin-Hmax) (mm)	650 - 750
▪ Advised mounting height ceramic hobs (Hmin-Hmax) (mm)	600 - 750
▪ Diameter outlet (mm)	150
▪ Position exhaust	Top

Lighting

▪ Functional lighting type	Led strip
▪ Functional light dimmable	▪
▪ Soft-ON/OFF	-
▪ Number of functional lights	2
▪ Total energy consumption functional light (W)	14
▪ Color functional light (K)	3000

Airflow and noise level





▪ Free airflow (m³/h)	700
-----------------------	-----

Airflow and noise level

- Airflow (m³/h) measured according to EN 61591
- Sound regulation according to EN 60704-2-13
- Airflow duct out speed 1 (m³/h) / Max pressure duct out speed 1 (Pa) 207 / 447
- Airflow duct out speed 2 (m³/h) / Max pressure duct out speed 2 (Pa) 276 / 489
- Airflow duct out speed 3 (m³/h) / Max pressure duct out speed 3 (Pa) 371 / 526
- Airflow duct out max powerspeed (m³/h) (Qboost) / Max pressure duct out max powerspeed (Pa) 592 / 559
- Sound pressure duct out speed 1 (dB(A)) / Sound power duct out speed 1 (dB(A)) 28 / 40
- Sound pressure duct out speed 2 (dB(A)) / Sound power duct out speed 2 (dB(A)) 33 / 45
- Sound pressure duct out speed 3 (dB(A)) / Sound power duct out speed 3 (dB(A)) 39 / 51
- Sound pressure duct out at max powerspeed (dB(A)) / Sound power duct out at max powerspeed (dB(A)) (LWAboost) 49 / 61

Technical specifications

- | | |
|---|------|
| ▪ Maximum power (W) | 238 |
| ▪ Voltage appliance (V) | 230 |
| ▪ Frequency (Hz) | 50 |
| ▪ Power consumption in stand-by-mode (Ps) (W) | 0,23 |
| ▪ Net weight (kg) | 15 |
| ▪ Length power supply cable (m) | 1 |

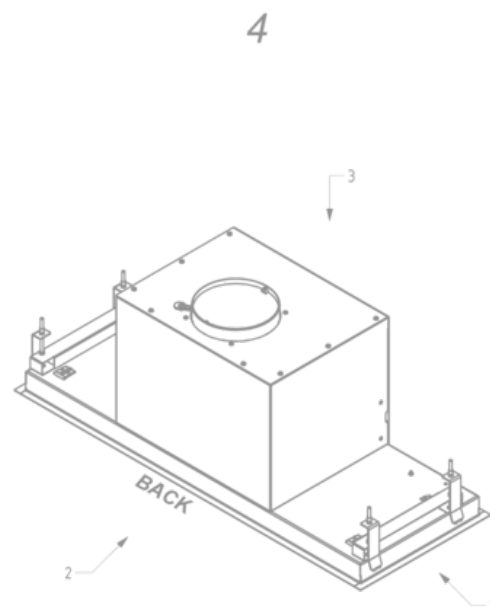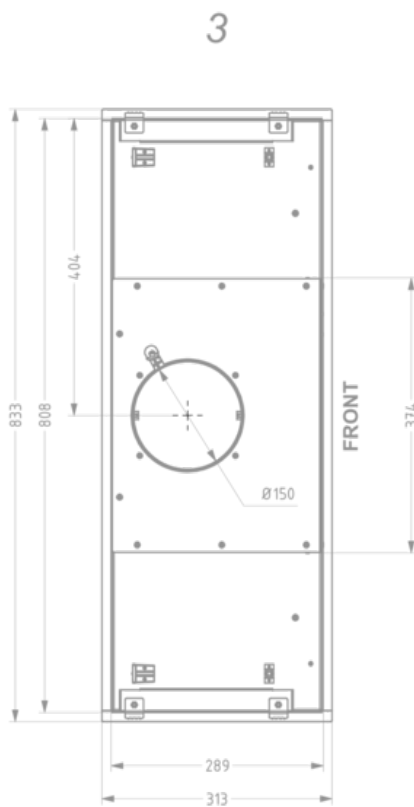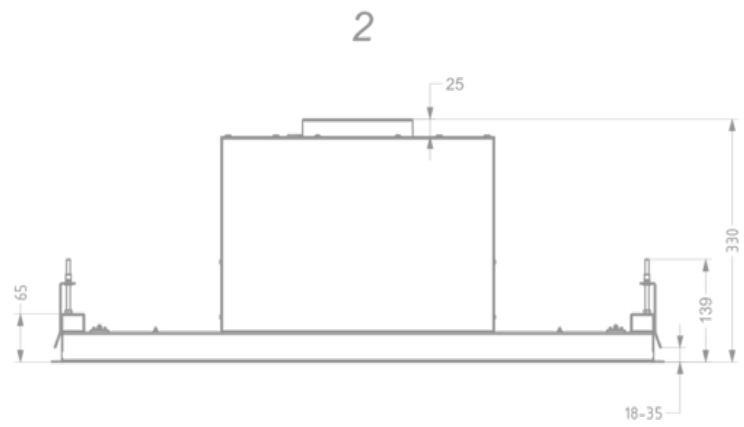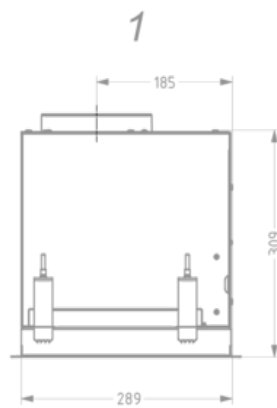

Installation accessories

Additional accessories

- 840029

Remote control (optional)

Accessories

Recirculation kit



26050400

Monoblock Recirculation set Novy Crystal

Control kit



990030

Kit connection with external cover and/or lighting

