

DA 3568

Slimline cooker hood  
with energy-efficient LED lighting and light-touch switches for easy use.



- Elegant design - slim 592mm extractor canopy
- Energy-efficient and uniform illumination - 2 LED spotlights
- Efficient filtration- 10-ply stainless-steel grease filter
- Safe and easy to clean - Miele CleanCover
- For perfect functionality - accessories for proper venting

EAN: 4002515988176 / material number: 10851420

|  |                 |
|--|-----------------|
| <b>Construction type</b>                                 |                 |
| Slimline cooker hood                                     | •               |
| <b>Design</b>  |                 |
| Colour   | Stainless steel |
| <b>Operating modes</b>                                   |                 |
| Type of air guide  | Convertible     |
| Active charcoal filter (order separately)                | DKF19-1         |
| <b>User convenience</b>                                  |                 |
| Electronic controls                                      | •               |
| Light-touch controls                                     | •               |
| Miele@mobile app   | •               |
| Power levels (number without Booster level)              | 3               |
| Booster level  | •               |
| Programmable Booster level switch-off                    | •               |
| Run-on time 5 / 15 min.                                  | •               |
| Grease filter saturation indicator programmable          | •               |
| Active charcoal filter saturation indicator programmable | •               |
| <b>Cleaning convenience</b>                              |                 |
| Easy-to-clean canopy interior – CleanCover               | •               |
| <b>Efficiency and sustainability</b>                     |                 |
| PowerManagement system                                   | •               |
| ECO package  | •               |
| <b>Appliance networking</b>                              |                 |
| Miele@home   | •               |
| WiFiConn@ct  | •               |
| MobileControl  | •               |
| ShopConn@ct  | •               |
| Automatic function Con@ctivity 3.0 (WiFi)                | •               |
| <b>Filter system</b>                                     |                 |
| Number of dishwasher safe stainless steel grease filters | 2               |
| <b>Lighting</b>  |                 |
| LED  | •               |
| Light intensity in Lx                                    | 420             |
| Colour temperature in K                                  | 3,500           |
| Dimmer function  | •               |
| <b>Fan</b>   |                 |
| Dual-action fan  | •               |
| ECO motor (DC motor)                                     | •               |

DA 3568


Slimline cooker hood  
with energy-efficient LED lighting and light-touch switches for easy use.



|   |             |
|---|-------------|
| <b>Air throughput with max. duct diameter in extraction mode (not for external version)</b> |             |
| Air throughput in Level 1 (m <sup>3</sup> /h)   | 190         |
| Air throughput in Level 2 (m <sup>3</sup> /h)   | 290         |
| Air throughput in Level 3 (m <sup>3</sup> /h)   | 400         |
| Air throughput in Booster level (m <sup>3</sup> /h)   | 635         |
| Sound power in Level 1 (dB(A) re 1 pW)  | 36          |
| Sound power in Level 2 (dB(A) re 1 pW)  | 44          |
| Sound power in Level 3 (dB(A) re 1 pW)  | 51          |
| Sound power in Booster level (dB(A) re 1 pW)  | 63          |
| Sound pressure in Level 1 (dB(A) re 20 µPa)   | 22          |
| Sound pressure in Level 2 (dB(A) re 20 µPa)   | 30          |
| Sound pressure in Level 3 (dB(A) re 20 µPa)   | 37          |
| Sound pressure in Booster level (dB(A) re 20 µPa)   | 49          |
| <b>Air throughput in recirculation mode</b>   |             |
| Air throughput in Level 1 (m <sup>3</sup> /h)   | 140         |
| Air throughput in Level 2 (m <sup>3</sup> /h)   | 225         |
| Air throughput in Level 3 (m <sup>3</sup> /h)   | 365         |
| Air throughput in Booster level (m <sup>3</sup> /h)   | 530         |
| Sound power in Level 1 (dB(A) re 1 pW)  | 46          |
| Sound power in Level 2 (dB(A) re 1 pW)  | 55          |
| Sound power in Level 3 (dB(A) re 1 pW)  | 65          |
| Sound power in Booster level (dB(A) re 1 pW)  | 73          |
| Sound pressure in Level 1 (dB(A) re 20 µPa)   | 32          |
| Sound pressure in Level 2 (dB(A) re 20 µPa)   | 41          |
| Sound pressure in Level 3 (dB(A) re 20 µPa)   | 51          |
| Sound power in Booster level (dB(A) re 1 pW)  | 59          |
| <b>Safety</b>   |             |
| Safety switch-off   | •           |
| <b>Technical data</b>   |             |
| Canopy width in mm  | 592         |
| Canopy height in mm   | 37          |
| Canopy depth in mm  | 309         |
| Minimum height above electric hobs in mm  | 450         |
| Minimum height above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm             | 650         |
| Net weight in kg  | 15.0        |
| Length of supply lead in m  | 1.5         |
| Total rated load in kW  | 0.09        |
| Voltage in V  | 230         |
| Fuse rating in A  | 10          |
| Number of phases  | 1           |
| <b>Installation notes</b>   |             |
| Extraction ducting connection at top  | •           |
| Extraction connection at top and rear   | •           |
| Diameter of extraction ducting connection in mm   | 150         |
| Combination with WiFi-enabled Miele hob   | recommended |
| <b>Standard accessories</b>   |             |
| Non-return flap   | •           |
| Adapter to reduce ducting diameter from 150 mm to 125 mm Ø                                  | •           |

DA 3568

Slimline cooker hood  
with energy-efficient LED lighting and light-touch switches for easy use.

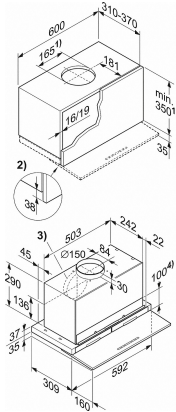

DA3568

1. Vented, recirculation with DUJ 150, when air is directed through a cut-out in the roof of the housing unit.
2. Housing unit carcass is 38 mm shorter than the door.
3. Vent connection alternatively to the rear.
4. After the wall unit has been installed, a partition can be fitted. The slots for grease filters and odour-absorbing filters for use in recirculation mode must be accessible.

In regard to dimensions for wall unit height and cut-outs, fitted accessories should be taken into account (e.g. silencers, XKM module).